

18V Lithium-ion LXT

18V + 18V → 36V

Expand Your Lithium Line Up
Product availability and specifications may vary by country or area.

Tools shown:
 Chain Saw: DUC252 / DUC252C, DUC400 / DUC353, DUC303 / DUC302
 Lawn Mower: DLM380 / DLM431
 Pruning Shear: DUP361
 Grass Shear: DUM604
 Blower: DUB183 / DUB182
 Hedge Trimmer: DUH483 / DUH523
 Recipro Saw: DJR187 / DJR187U, DJR185 / DJR183
 Chain Saw: DUC122
 Grass Trimmer: DUR187L / DUR187U, DUR188L / DUR188U
 String Trimmer: DUR181
 Garden Sprayer: DVF154 / VF104
 Lawn Mower: BLM430 / LMA300
 Multi Function Power Head: BUX360 / UX360D
 Brushcutter: BSC300L / BC300LD, BUR360 / UR360D
 Grass Trimmer: DUR365U / DUR364L, DUR361U / DUR362L, DUR366L
 Multi Function Power Head: DUX60
 Hedge Trimmer: DUH651 / DUH551
 Blower: DUR362 / DUR361
 Chain Saw: BUC300 / UC300D, BUC250 / UC250D
 Hedge Trimmer: BUH650 / UH650D, BUH550 / UH550D
 Pole Hedge Trimmer: BUN490 / UN490D
 Olive Harvester: BHL360 / HL360D
 Blower: BUR360 / UR360D
 Cultivator: BUK360 / UK360D
 String Trimmer: BSC300L / BC300LD, BUR360 / UR360D

Battery Converter:
 BCV03 (option) + 2x 18V → 36V
 BCV01 (option) + 2x 18V → 36V

Batteries:
 6.0Ah BL1860B, 5.0Ah BL1850B, 4.0Ah BL1840B, 3.0Ah BL1830B, 2.0Ah BL1820B, 1.5Ah BL1815N

Note: Users, who have 2 units of 18V battery can make use of 36V cordless tools.



Battery Powered Wheelbarrow DCU180



Powered by LXT 18V battery

Battery box is able to hold two selectable batteries



Carries all kind of heavy loads with optional carrier or bucket



Carrier type



Bucket type

can load sand, gravel, powder etc.



Li-ion Battery, Charging Time Chart (approx): min.

	BL1815N 1.5Ah	BL1820B 2.0Ah	BL1830B 3.0Ah	BL1840B 4.0Ah	BL1850B 5.0Ah	BL1860B 6.0Ah
DC18RC	15 min	24 min	22 min	36 min	45 min	55 min
Two port multi Fast Charger DC18RD						
DC18SD	30 min	45 min	60 min	90 min	110 min	130 min



Two variations

Carrier set
Part No. 199116-7
Part No. 199009-8 (EU)

Bucket set
Part No. 198494-2
Part No. 199008-0 (EU)

Battery Powered Wheelbarrow DCU180

- Variable Speed
- Reversing
- Electronic 2-Speed
- Constant Speed
- Soft Start
- Built-in Job Light

Standard Equipment:
Lock Key, Support Legs, Wrenches

*Items of standard equipment and specifications may vary by country or area.
The weight may differ depending on the attachment(s), including the battery cartridge.
The lightest and heaviest combination, according to EPTA-Procedure 01/2014*

DCU180

Max Run Time (min)	with BL1860B: 120
Max Load Capacity	130 kg (290 lbs.)
Traveling Speed	Forward, High / Low: 0 - 3.5 / 0 - 1.5 km/h Reverse: 0 - 1 km/h
Max Climbing Capacity	12°
Dimensions (L x W x H)	When carrier is installed / During operation: 1,315x1,060x900 mm (51-3/4"x41-3/4"x35-1/2") When bucket is installed / During operation: 1,310x820x900 mm (51-1/2"x32-1/4"x35-1/2")
Net weight	Carrier type: 44.5 - 44.8 kg (98.0 - 98.7 lbs.) Bucket type: 39.3 - 39.6 kg (86.5 - 87.2 lbs.)

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201708

No Exhaust Gas, Low Vibration, Low Noise

Ideal for use at urban construction sites and on farms



Variable 2-speed & reverse design for optimum speed control and small radius turn

Constant speed control automatically applies additional power to the motor to maintain speed under load

Max loading capacity

130kgs


able to move heavy loads with no back pain

Max climbing angle

12°

Brake lever with locking mechanism

prevents the accidental start on a slope. (Front wheel)

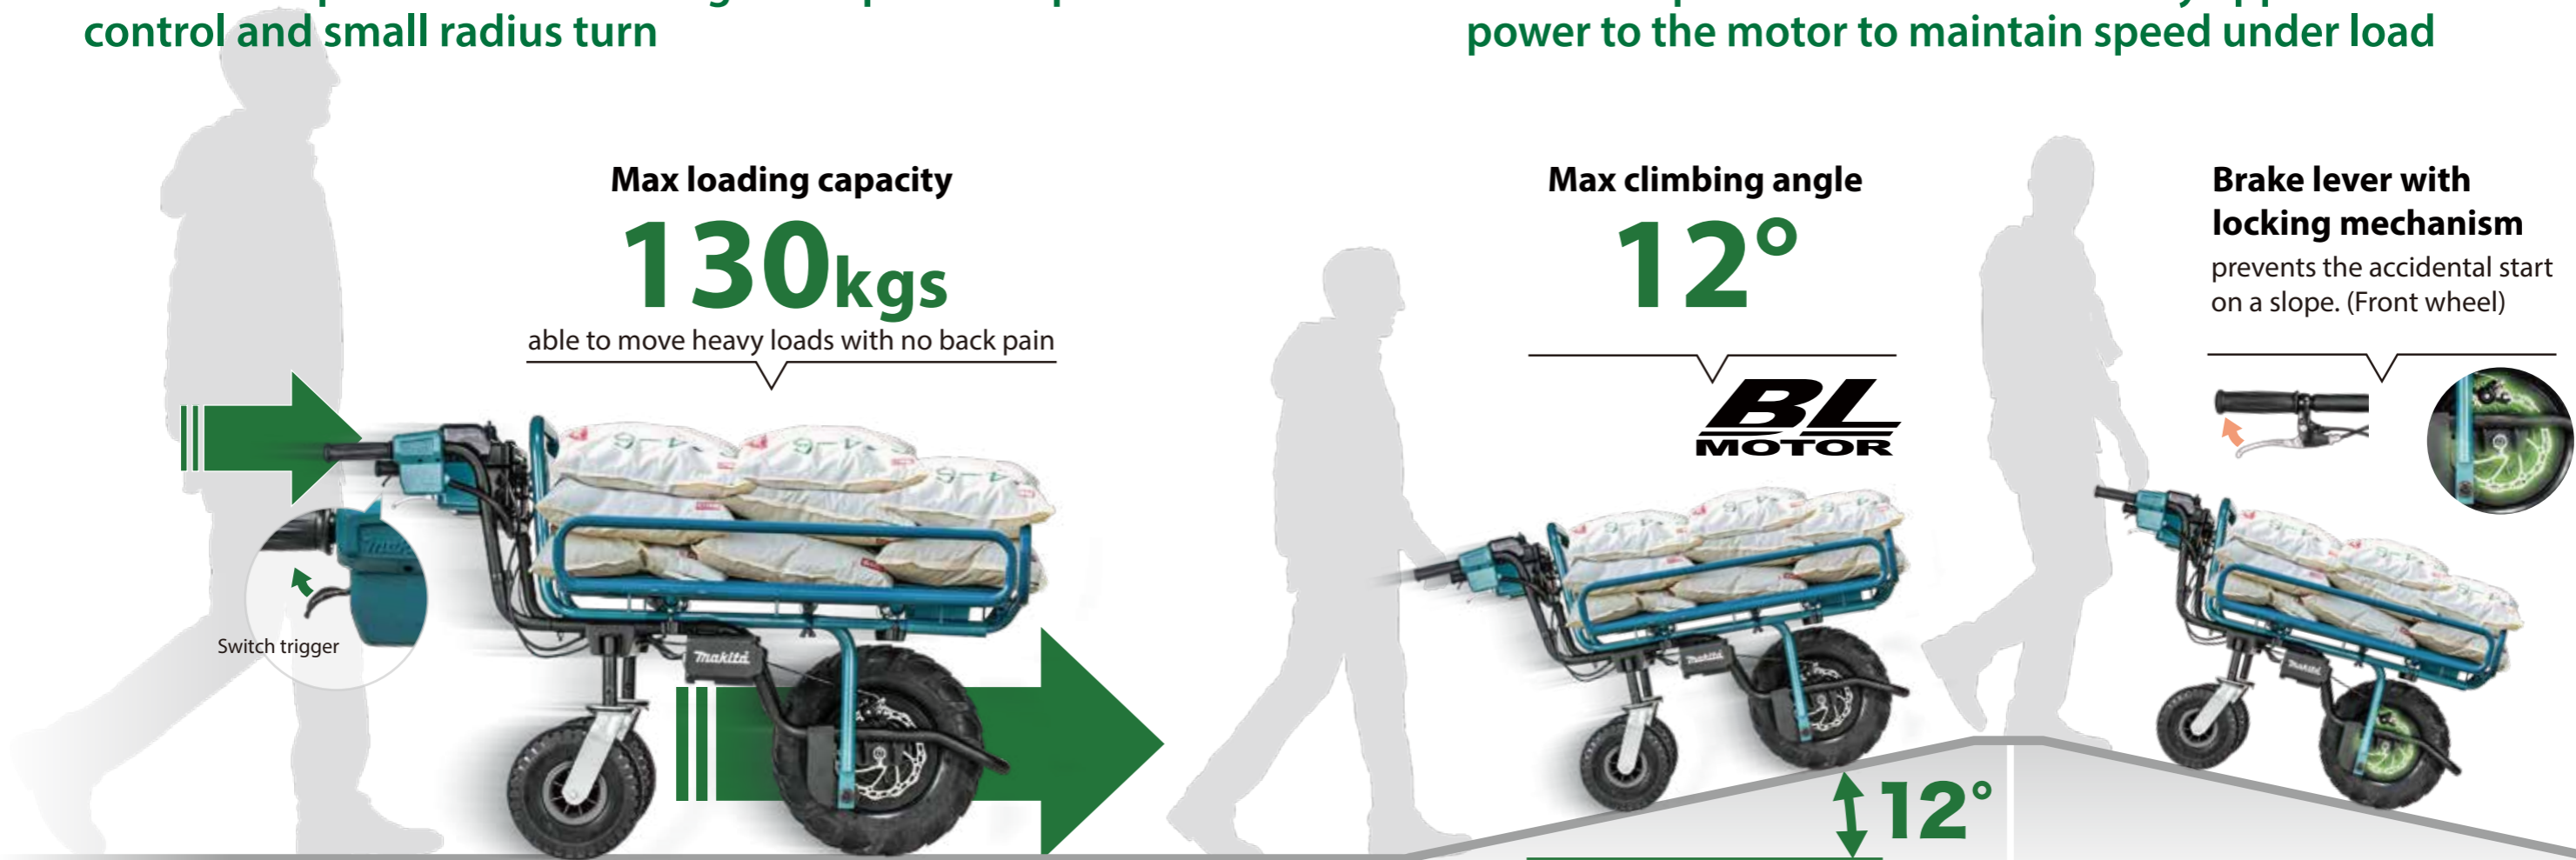

Battery box is able to hold two selectable batteries



Battery cartridge can be selected with the battery selection switch

All switch positions are all within easy reach and are simple to use.



Dual LED job lights



Detachable Rear wheel

After removing rear wheels and installing Foot (left/ right), the cart can be used as a unicycle.



Foldable handle



XPT
EXTREME PROTECTION TECHNOLOGY

washable with tap water (High pressure washer cannot be used.)

