



# Cordless Impact Wrench

DTW300 / DTW301 1/2" (12.7 mm)

DTW302 3/8" (9.5 mm) **new**



## Lightweight and easy to handle



photo: DTW301

Max Fastening Torque  
DTW300, DTW301

**330** N·m

DTW302 **300** N·m

Overall Length  
DTW300, DTW301

**144** mm

DTW302 **138** mm

### DTW300

1/2" (12.7 mm)  
C ring



### DTW301

1/2" (12.7 mm)  
Pin detent



### DTW302 **new**

3/8" (9.5 mm)  
C ring



# High Torque


## Max Fastening Torque

# 330 / 300 N·m


(DTW300, DTW301) (DTW302)

## Changing the application mode

This tool employs several easy-to-use application modes for driving bolts with good control.

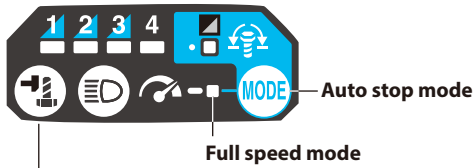

### Pushing a button

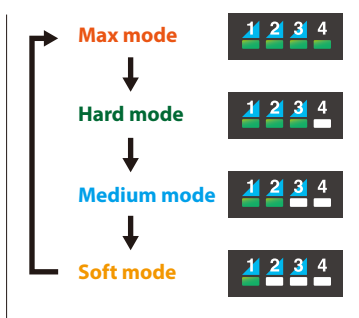

### C ring

**DTW300**  
1/2" (12.7 mm)  
**DTW302**  
3/8" (9.5 mm)

### Pin detent

**DTW301**  
1/2" (12.7 mm)

### Twin LED job light

with preglow and afterglow functions




## Compact overall length

DTW300, DTW301 **144 mm**  
DTW302 **138 mm**



photo: DTW300

### Proper fastening torque curve (DTW300, DTW302)

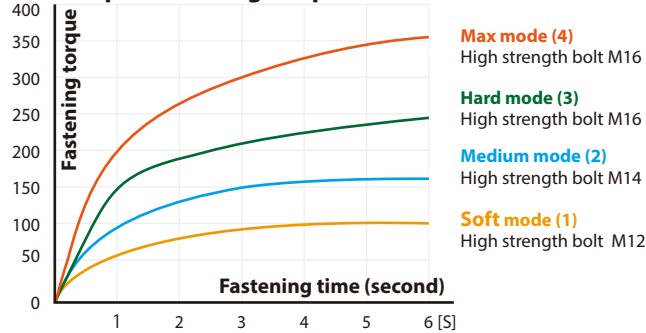

**BL MOTOR**  
High power Brushless Motor

**XPT**  
Extreme Protection Technology



photo: DTW300

## Accessories

**Tool hanger set**  
with shoulder belt  
Part No. 197941-0



**Tool hanger set**  
Part No. 191K57-9



18V LITHIUM-ION	DC18RC	
	DC18RD	DC18SD
BL1815N 1.5Ah	15 min	30 min
BL1820B 2.0Ah	24 min	45 min
BL1830B 3.0Ah	22 min	60 min
BL1840B 4.0Ah	36 min	90 min
BL1850B 5.0Ah	45 min	110 min
BL1860B 6.0Ah	55 min	130 min

## Cordless Impact Wrench

**DTW300/ DTW301 1/2" (12.7 mm) / DTW302 3/8" (9.5 mm)**

	DTW300/ DTW301	DTW302
Variable Speed	<b>Fastening Capacities</b>	
Brake	Standard Bolt: M10 - M20 (3/8" - 3/4")	
Reversing	High Strength Bolt: M10 - M16 (3/8" - 5/8")	
Electronic 4-Speed	Square Drive: 12.7 mm (1/2")	
Built-in Job Light	No Load Speed (RPM): 0-3,200/0-2,600/0-1,800/0-1,000	
Carrying Case	Impacts Per Minute (IPM): 0-4,000/0-3,400/0-2,600/0-1,800	
Standard Equipment:	Max Fastening Torque: 330 N·m (240 ft.lbs.)	
Belt Clip, Battery, Charger	Vibration Level: 12.5m/s <sup>2</sup>	
	Sound Pressure Level: 97 dB(A)	
	Sound Power Level: 108 dB(A)	
	Dimensions (L x W x H): w/ BL1815N / BL1820B: 144x81x228 mm (5-5/8"x3-3/16"x9")	
	w/ BL1830B / BL1840B / BL1850B / BL1860B: 144x81x246 mm	
	w/ BL1815N / BL1820B: 138x81x228 mm (5-7/16"x3-3/16"x9")	
	w/ BL1830B / BL1840B / BL1850B / BL1860B: 138x81x246 mm	
	Net weight: 1.5 - 1.8 kg (3.4 - 4.1 lbs.)	
	1.4 - 1.8 kg (3.1 - 4.0 lbs.)	

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202108