



Cordless Angle Impact Driver TL064D
Cordless Angle Impact Wrench TL065D

↑
53mm
↓

↔
18mm

**Angle Impact Driver
TL064D**



Ultra-Compact Angle Head

Ideal for Fastening in Tight Spots

**Angle Impact Wrench
TL065D**



Powered by Slide Li-ion Battery of Makita's New 12V max Platform



Compact & Slim for Easy Handling

Head height
53 mm

Center height
18 mm

Max fastening torque
60 N·m

Lightweight
1.3 kg
(2.8lbs.)
w/BL1016

Phosphorescent bumper

Belt clip

Photo: TL064D

Single LED job light with preglow/ afterglow functions




Li-ion Battery & Charging Time Reference, Compatibility Chart

	DC10SB	DC10WD
*with Battery fuel gauge		
BL1016 1.5Ah	22 min	50 min
*BL1021B 2.0Ah	30 min	70 min
*BL1041B 4.0Ah	60 min	130 min

For fastening and loosening in tight spaces



Angle wrench head




Ergonomically designed handle with sure grip



Accessories

Optional attachments for versatility

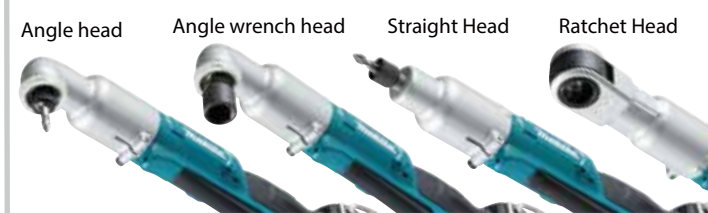

Angle head
Part No. 135183-8
(For C-form bit)
Part No. 135200-4




Angle wrench head
9.5mm (3/8") square drive
Part No. 135201-2



Straight head
Part No. 192440-7
(For E-form bit)
Part No. 192486-3



Ratchet head
Part No. 192439-2



Socket adapter
Use with Ratchet head
9.5mm (3/8") square drive
Part No. 134745-9
12.7mm (1/2") square drive
Part No. 134746-7



Socket
Use with Ratchet head
Size: 17x 31
Part No. 134743-3
Size: 19x 33
Part No. 134744-1



Cordless Angle Impact Driver TL064D

Cordless Angle Impact Wrench TL065D

	TL064D
Variable Speed	
Brake	
Reversing	
Built-in Job Light	
Carrying Case	
Standard Equipment: Phillips Bit, Belt Clip, Battery, Charger	
Capacity	Machine Screw: M4 - M8 (5/32" - 5/16") Standard Bolt: M4 - M12 (5/32" - 1/2") High Tensile Bolt: M4 - M8 (5/32" - 5/16") Coarse thread (in length): 22 - 75mm (7/8" - 2-31/32")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	0 - 2,000
Impacts Per Minute (IPM)	0 - 3,000
Max Fastening Torque	60 N·m (530 in.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 15.0 m/s ²
Sound Pressure Level	91 dB(A)
Sound Power Level	102 dB(A)
Dimensions(L x W x H)	361x66x86mm (14-1/4"x2-5/8"x3-3/8")
Net weight	1.3kg (2.8lbs.)- 1.6kg (3.6lbs.)
	TL065D
Variable Speed	
Brake	
Reversing	
Built-in Job Light	
Carrying Case	
Standard Equipment: Belt Clip, Battery, Charger	
Capacity	Standard Bolt: M4 - M12 (5/32" - 1/2") High Tensile Bolt: M4 - M8 (5/32" - 5/16")
Square Drive	9.5 mm (3/8")
No Load Speed (RPM)	0 - 2,000
Impacts Per Minute (IPM)	0 - 3,000
Max Fastening Torque	60 N·m (530 in.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 18.0 m/s ²
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Dimensions(L x W x H)	361x66x86mm (14-1/4"x2-5/8"x3-3/8")
Net weight	1.3kg (2.8lbs.)- 1.6kg (3.6lbs.)

Items of standard equipment and specifications may vary by country or area. The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201705