Automatic cleaning Able to run automatically to collect dust and debris.

Selectable two dust collection modes

Pattern cleaning mode

Random cleaning mode



For cleaning wide spaces with few

obstacles. (Ex.) well-organized






For cleaning locations with many obstacles. (Ex.) offices, etc.

warehouses, long corridors, etc. **Mode button**

for selecting Random/ Pattern mode

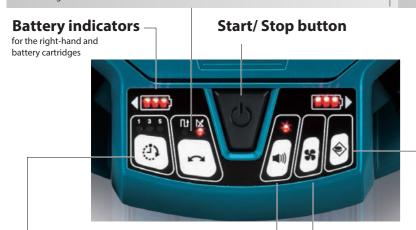

On-timer button

Enables automatic on at 1, 3 or 5 hours

For automatic cleaning a deserted office, warehouse, etc. (eg at night)

Vacuum button

for turning on/ off vacuum fan

Buzzer button

Three levels of buzzer volume including mute can be selected.

Cleaning area setting function







enables user to define a cleaning area by putting boundary tape on the floor as boundary line that the cleaner cannot pass.

Boundary sensor button

for turning on/ off boundary sensor

Wireless remote controller

• For finding the location of the cleaner after cleaning is finished (The cleaner will indicate its location with buzzer and LED light each time you push a button on Wireless remote controller.)



- For start/ stop control, etc.
- Communication range: 20m



Pilot lamp

The buzzer beeps and the pilot lamp flashes during cleaning.

Easy machine

Dust box:

Attachable/ detachable from the top of the



Power brush:

Detachable and Water-washable



Filter/ **Dust box:** Washable wholly

Max runnina speed

Max running
Dust box capacity
Dimensions (L x W x H)



BL1850B x 2: 200

BL1830B x 2: 120 BL1850B x 2: 500 m²

BL1830B x 2: 300 m²

460x460x180mm

(18-1/8"x18-1/8"x7-1/8")

BL1850Bx2: 7.3 kg (16.1 lbs) BL1815Nx2: 7.8 kg (17.2 lbs)

0.3 m/sec

weight according to EPTA-Procedure 01/ver.2.1

Option

Boundary line tape (15m roll)



Part No. SH00000065



Power brush

Part No. SH00000063 Turn brush cover



Battery/ Charger



with Battery fuel gauge BL1860B: 6.0Ah BL1820B: 2.0Ah BL1850B: 5.0Ah *BL1815N: 1.5Ah BL1840B: 4.0Ah (*without Battery BL1830B: 3.0Ah fuel gauge)

Fast Charger Two Port Multi DC18RC Fast Charge







Makita Corporation

Side brush, Boundary tape (15m roll)

Wireless remote controller (including two AAA alkaline batteries),

Robotic Cleaner DRC200

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201606




Robotic Cleaner







Makita's Intelligent Robotic Cleaner

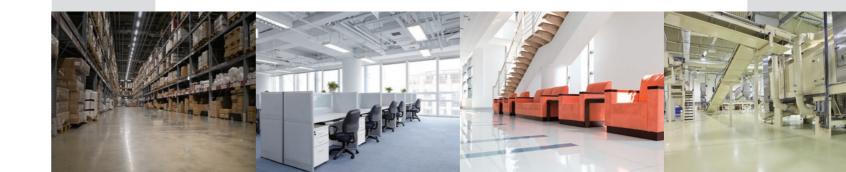



Powered by two 18V Li-ion battery in parallel

[Also able to run with a single battery]



"Vacuum plus Power brush" mode for collecting both small and large debris

Long run time

About 200_{min}

Tile carpet: About 170min with BL1850Bx2

About 120min

Tile carpet: About 100min with BL1830Bx2


Continuous run time on a single full battery charge


When collecting large debris only, with the vacuum




- Turning the vacuum fan OFF *about 1000m² with BL1850Bx2

"Power brush only" mode for collecting large debris only






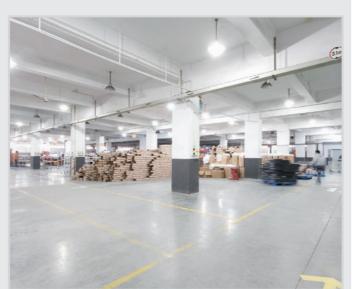


*with a coverage rate of 80%

Excellent cleaning features useful in commercial applications

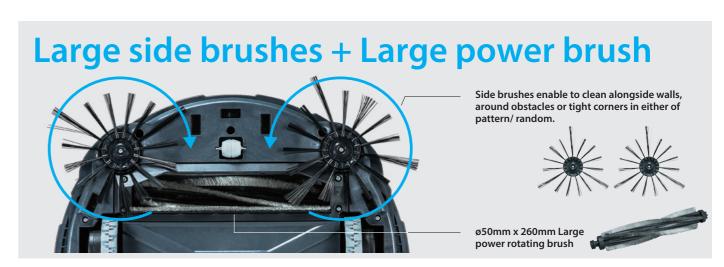



Dual compartment structure - one for small debris, the other for large debris - is ideal for commercial use.



Vacuum fan sucks up small debris into upper compartment.

Power brush picks up large debris into lower



Outstanding in its class, large dust box capacity

